
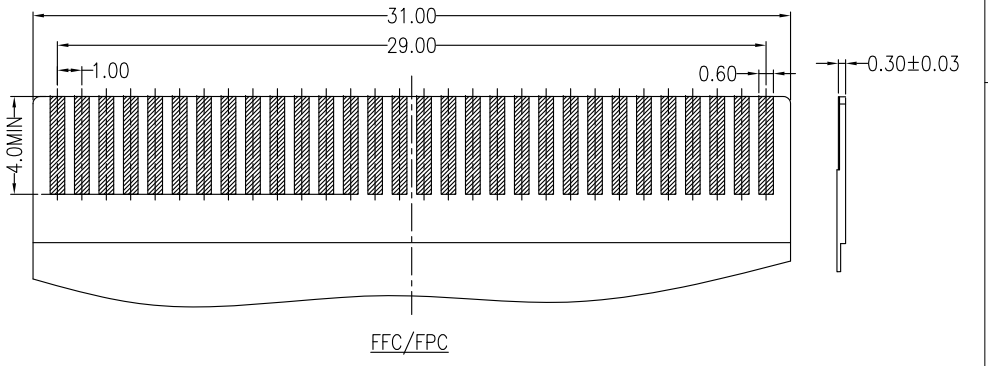
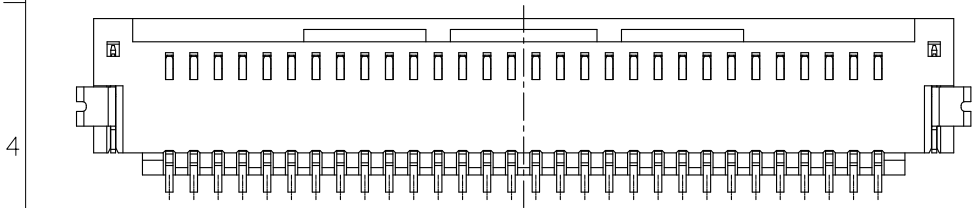
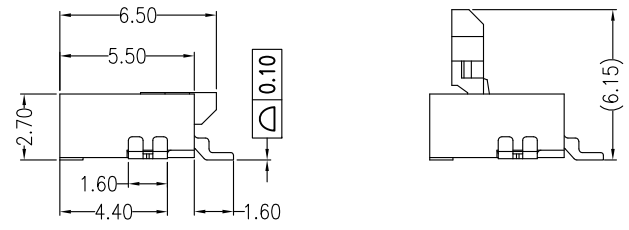
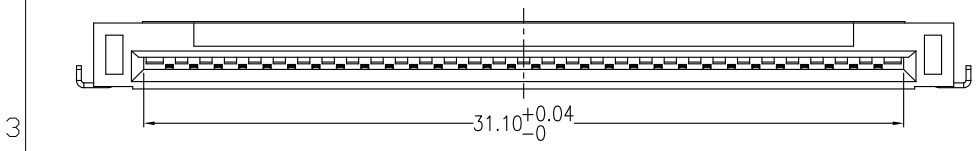
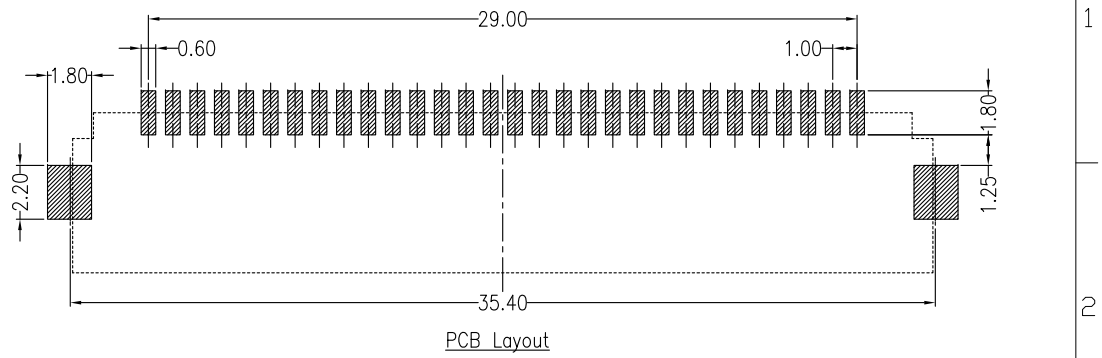


REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	S.H.Huang	2024.04.13

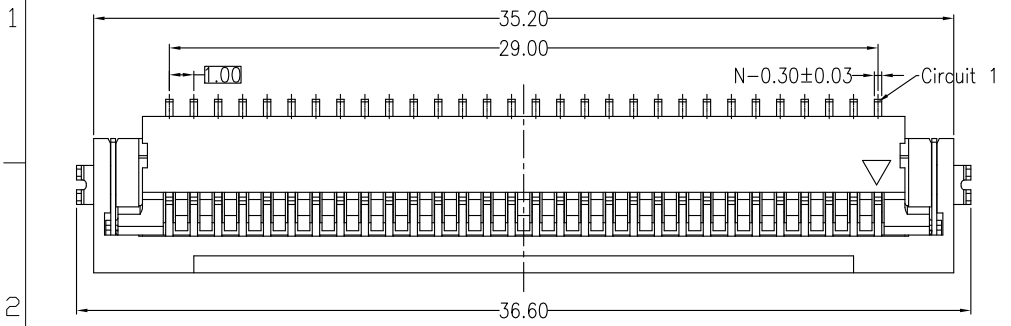

Specifications:
 Contact resistance: ≤30mΩ
 Insulation resistance: ≥100MΩ
 Rated voltage: 100V AC/DC
 Rated current: 1A AC/DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: -40~+105°C

ORDER INFORMATION:
 F1007AWR-30-F4MB1-R
 PART No. _____
 No.OF CIRCUITS: 30
 PLASTIC MATERIAL: F4M=LCP(natural)
 PACKAGING: R=REEL G=TUBE
 Metal code: 1=Phosphor Bronze
 PLATING: B=Matte Tin

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.			TITLE: FPC Pitch0.5 H2.7 ZIF CONN.SMT Back-Flip Type	
GENERAL TOLERANCE		USE:	PART NO.:	
X.X ±0.15	X. ±5°	CUSTOMER	F1007AWR-30-F4MB1-R	
X.XX ±0.10	X.X ±2°	APPD: J.J.Yao	DWG NO.:	
X.XXX ±0.05	X.XX ±1°	CHKD: X.F.Yan	JKUN-GCKH-1723	
UNITS: mm		DR: S.H.Huang	SCALE 3 : 1	SHEET 1 / 1